



Box Chimney Cookerhood


BE1900



BE1900 - Box Chimney Cookerhood

Installation

Features

- Extraction or Recirculation operation
-  Electronic soft buttons control
- Number of speeds : 3 + 1 intensive
- Stainless Steel ProVent filter (grease filtration over 90%)
- Colour : Stainless Steel

Technical Information

- Extraction flow : 950 m³/hr
- Number of motor : 1
- Number of lamp : 2 x 20W (halogen lamp)
- Length of chimney (lower / upper) : 685 / 215 mm
- Diameter of air duct : 150 mm
- Socket / Fuse spur unit : 13A
- Length of power cord : 1000mm

Product Dimensions (mm)


- 795-935H x 898W x 485D

Country of Origin


- Italy

* Carbon filter is needed for recirculation type.

Extraction type installation :

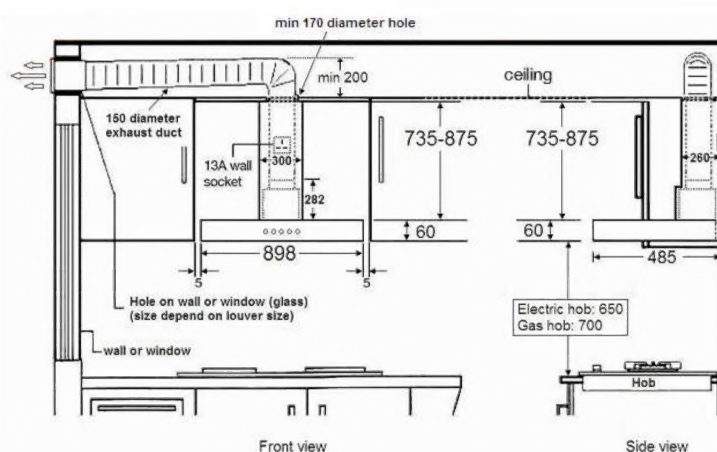

Recirculation type installation :

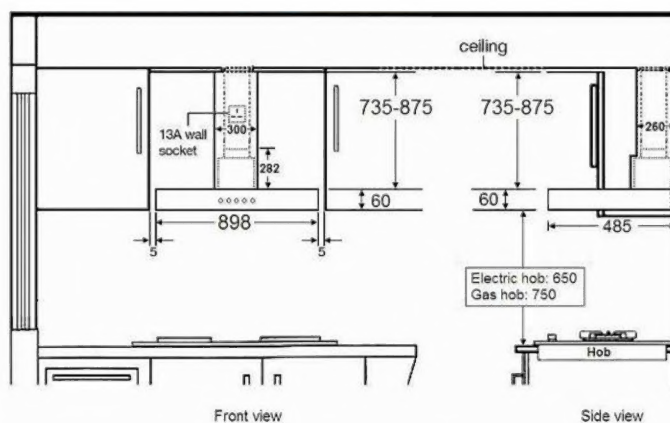

** Carbon filter is needed for recirculation type.

Unit: mm
Above diagram is not to scale